


SlowStop® 4" Modular FlexRail PC Guardrail (SS4Y-GRS)



MASS (LBS)	2500	5000	7500	10000	15000	20000	25000	40000	80000
SPEED (MPH)									
1.0									
2.0									
3.0									
4.0									
5.0									
6.0									
7.0									
8.0									
9.0									
10.0									
11.0									
12.0									

No / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is Under-Sized

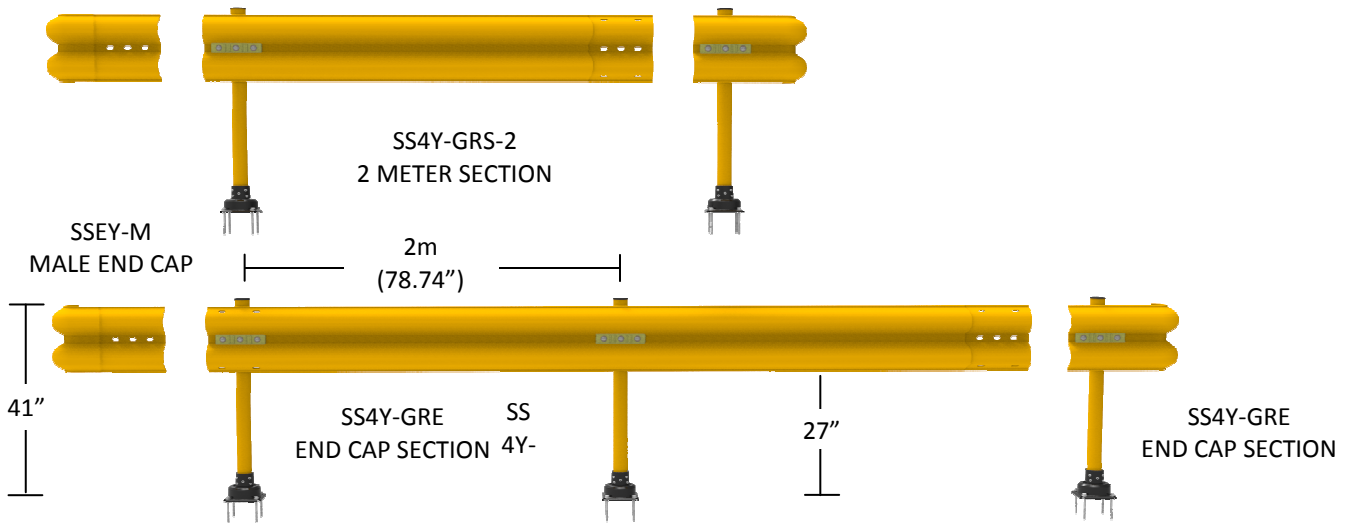

SPECIFICATIONS

- Includes 4" SlowStop Bollards—42" tall
- Break Strength: 11.2 kN
- Energy Absorption 24,785 Joules—Rail Impact
- Max deflection: 85cm at break
- Temperature Rating: -40°C to 115°C
- Traffic Yellow (RAL 1023) Throughout
- No bending equipment required for curves
- Custom Heights Available

RECOMMENDED USES

- Industrial Equipment Protection
- Pedestrian Aisle Ways
- Utility Guarding
- Access Denial
- Parking Perimeters

